

# (12) UK Patent Application (19) GB (11) 2 393 199 (13) A

(43) Date of Printing by UK Office 24.03.2004

(21) Application No: 0324709.5

(22) Date of Filing: 29.08.2002

(30) Priority Data:

(31) 09949988 (32) 10.09.2001 (33) US  
(31) 10132424 (32) 25.04.2002

(86) International Application Data:  
PCT/GB2002/003936 En 29.08.2002

(87) International Publication Data:  
WO2003/023186 En 20.03.2003

(71) Applicant(s):  
Weatherford/Lamb Inc.  
(Incorporated in USA - Delaware)  
515 Post Oak Boulevard, Suite 600,  
Houston, Texas 77027,  
United States of America

(continued on next page)

(51) INT CL<sup>7</sup>:  
E21B 43/10


(52) UK CL (Edition W):  
E1F FLA

(56) Documents Cited by ISA:  
GB 2345308 A WO 2000/037766 A2  
US 6189816 B1

(58) Field of Search by ISA:  
INT CL<sup>7</sup> E21B  
Other: EPO-Internal

(54) Abstract Title: An expandable hanger and packer

(57) An apparatus and method of creating a seal between two coaxial tubulars so as to create a hanger and a packer. A first tubular (200) is disposed coaxially within a portion of a second, larger tubular (400). A portion of the first tubular is expanded into frictional contact with the second tubular, thereby creating a liner and a hanger. In one embodiment, a pattern of grooves (210) and profile cuts (205) is formed in the surface of a portion of the first tubular body. The grooves and profile cuts in one aspect define a continuous pattern about the circumference of the tubular body which intersect to form a plurality of substantially identical shapes, such as diamonds. The grooves and profile cuts serve to improve the tensile strength of the tubular body. At the same time, the grooves and profile cuts allow for expansion of the tubular body by use of less radial force. The grooves and profile cuts further provide a gripping means, providing additional frictional support for hanging the expanded tubular onto the inner surface of a surrounding second tubular. Carbide inserts (220) are preferably interdisposed within the pattern of grooves, providing additional gripping means when the smaller diameter tubular body is expanded into the second tubular.

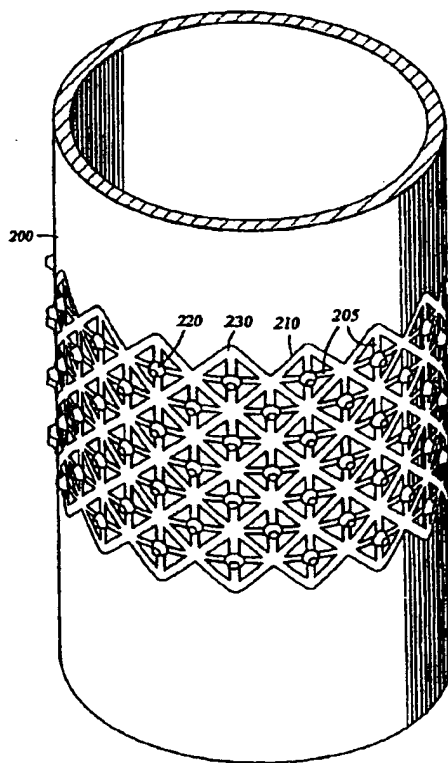

GB 2 393 199

**GB 2393199 A continuation**

**(72) Inventor(s):**

**Stephen L. Jackson  
Patrick Maguire  
Khai Tran**

**(74) Agent and/or Address for Service:**

**Marks & Clerk  
4220 Nash Court,  
Oxford Business Park South, OXFORD,  
OX4 2RU, United Kingdom**